

40 Watt — LB40W V1.0

Third Generation: class 2 dimming, dim-to-1%-to-off, standby power <0.5W

CONSTANT CURRENT LED DRIVER WITH 0-10V DIMMING.

US & CN LED Driver Class 2

LB Series Driver is a high-performance LED driver that provides smooth, continuous 1% dimming for virtually any LED fixture, whether it requires constant current. It provides the performance of class 2 isolating dimming and dim to off. It is the most versatile LED driver offered today due to its compatibility with a wide variety of LED arrays, multiple form factors, and numerous control options.

Key Features

- Drive Mode: Constant Current, Dimming, Standby.
- Technology: Active PFC 1-Stage Switch Mode.
- Input Voltage: 120 to 277 Vac (UL), 100 to 240 Vac (ENEC).
- Output Power: 40 Watt Max.
- Dimming: Smooth & Continuous Dimming from 1% to 100%, dim-to-off. LEDs turn on to any dimmed level without going to full brightness. Constant Current Reduction (CCR) dimming methods.
- 0-10V: 2 or 3-wire Analog / Digital Control Dimming (Isolated type).
- Output Voltage: 12 Vdc to 114 Vdc.
- Output Current: 350 mA to 1670 mA (100% load).
- Efficiency: Up to 88%.
- Warranty: 5 years.

Special Features

- Continuous dimming from 1% to 100%, dim to off.
- Safety isolation between primary and secondary.
- Dimming control is class 2 isolated from AC input and DC output.
- Standby power <0.5W (when dim to off).
- The dimming curve is optional (linear or logarithmic, default: linear).
- A rated lifetime of 50,000 hours @ Tc = 85°C.
- Safety: UL8750, 2nd Edition, UL1310 Class 2, CSA22.2, EN61347.
- EMC: FCC 47CFR Part 15, Class B @120V & Class A @277V, EN55015.
- Inrush current limiting circuitry: AC power line: line to line 2 kV, eliminates circuit breaker tripping, switch arcing and relay failure.
- Plastic shell, used with silicone potting. Meet the RoHs directive.
- IP66, NEMA4 compliant for dry, damp.
- 100% performance tested with CHROMA 8000 system at YG factory.
- 100% burned in with program-control test system at YG factory, at 50 degrees ambient temperature.



Enclosure



Notice of use:

1. The DIM+ line can't touch the DC+ line and AC line.
2. DC- cannot be shorted with the DIM-.

Size	Unit	Inch	Millimeter
Case Length		3.78	96.00
Case Width		2.80	71.00
Case Height		1.26	32.00
Mounting Length		3.38	86.00

LED wiring distance

Recommended maximum wiring distance at full load.

AWG	#20	#19	#18	#17	#16
Distance (m)	14	18	22	28	36
Distance (ft)	45.9	59	72.2	91.9	118.1

40W 0-10V Dimming Part List

No.	Part Number	US Class 2	CN Class 2	Output Voltage Range	Output Current Range	Current Accuracy	Power Factor	Output Power	Max. Eff.	UL	cUL	ENEC	CB
1	LB40W-114-C0350-RD	—	—	57~114 Vdc	3.5 – 350 mA	±5%	0.90	40W	88%	✓	✓	—	—
2	LB40W-80-C0500-RD	—	—	40~80 Vdc	5.0 – 500 mA	±5%	0.90	40W	88%	—	—	✓	✓
3	LB40W-72-C0550-RD	—	—	36~72 Vdc	5.5 – 550 mA	±5%	0.90	40W	88%	✓	✓	—	—
4	LB40W-57-C0700-RD	Yes	Yes	28~57 Vdc	7.0 – 700 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
5	LB40W-48-C0830-RD	Yes	Yes	24~48 Vdc	8.3 – 830 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
6	LB40W-43-C0930-RD	Yes	Yes	21~43 Vdc	9.3 – 930 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
7	LB40W-40-C1000-RD	Yes	Yes	20~40 Vdc	10 – 1000 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
8	LB40W-38-C1200-RD	Yes	Yes	20~40 Vdc	10 – 1000 mA	±5%	0.90	45.6W	86%	✓	✓	—	—
9	LB40W-36-C1100-RD	Yes	Yes	18~36 Vdc	11 – 1100 mA	±5%	0.90	40W	85%	✓	✓	✓	✓



Excellent LED Drivers

Sino-US joint venture

10	LB40W-30-C1300-RD	Yes	Yes	15~30 Vdc	13 – 1300 mA	±5%	0.90	39W	85%	✓	✓	✓	✓
11	LB40W-28-C1400-RD	Yes	Yes	14~28 Vdc	14 – 1400 mA	±5%	0.90	39W	85%	✓	✓	—	—
12	LB40W-24-C1670-RD	Yes	Yes	12~24 Vdc	16 – 1670 mA	±5%	0.90	40W	84%	✓	✓	✓	✓

40W Constant Current Part List

No.	Part Number	US Class 2	CN Class 2	Output Voltage Range	Output Current	Current Accuracy	Power Factor	Output Power	Max. Eff.	UL	cUL	ENEC	CB
1	LB40W-114-C0350	—	—	57~114 Vdc	350 mA	±5%	0.90	40W	88%	✓	✓	—	—
2	LB40W-80-C0500	—	—	40~80 Vdc	500 mA	±5%	0.90	40W	88%	—	—	✓	✓
3	LB40W-72-C0550	—	—	36~72 Vdc	550 mA	±5%	0.90	40W	88%	✓	✓	—	—
4	LB40W-57-C0700	Yes	Yes	28~57 Vdc	700 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
5	LB40W-48-C0830	Yes	Yes	24~48 Vdc	830 mA	±5%	0.90	40W	87%	✓	✓	✓	✓
6	LB40W-43-C0930	Yes	Yes	21~43 Vdc	930 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
7	LB40W-40-C1000	Yes	Yes	20~40 Vdc	1000 mA	±5%	0.90	40W	86%	✓	✓	✓	✓
8	LB40W-38-C1200	Yes	Yes	20~40 Vdc	1000 mA	±5%	0.90	45.6W	86%	✓	✓	—	—
9	LB40W-36-C1100	Yes	Yes	18~36 Vdc	1100 mA	±5%	0.90	40W	85%	✓	✓	✓	✓
10	LB40W-30-C1300	Yes	Yes	15~30 Vdc	1300 mA	±5%	0.90	39W	85%	✓	✓	✓	✓
11	LB40W-28-C1400	Yes	Yes	14~28 Vdc	1400 mA	±5%	0.90	39W	85%	✓	✓	—	—
12	LB40W-24-C1670	Yes	Yes	12~24 Vdc	1670 mA	±5%	0.90	40W	84%	✓	✓	✓	✓

Input Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Input Voltage	100 Vac	---	277 Vac	100, 120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	50/60 Hz	63 Hz	50/60 Hz Nominal
Input AC Current	---	---	0.43 A	Measured at 120 Vac / 60Hz Input, Output Full Load.
	---	---	0.24 A	Measured at 230 Vac / 50Hz Input, Output Full Load.
	---	---	0.21 A	Measured at 277 Vac / 60Hz Input, Output Full Load.
Inrush Current (Peak)	---	30 A / 2uS	40 A / 3uS	Measured at 120 Vac / 60Hz Input, Output Full Load.
	---	40 A / 2uS	50 A / 3uS	Measured at 277 Vac / 60Hz Input, Output Full Load.
Leakage Current	---	---	300 μ A	Measured at 120 Vac / 60Hz Input, Output Full Load.
	---	---	700 μ A	Measured at 277 Vac / 60Hz Input, Output Full Load.
THD	---	12%	20%	Measured at 120, 230, 277 Vac Input, \geq 70% Load.
Power Factor (PF)	0.90	---	0.99	
Standby Power	0.1 W	0.2 W	0.5 W	Measured at 120, 230, 277 Vac Input, When dim to off ($V_{dim} < 1.0V$).

Output Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
DC Output Voltage	Per Table	Per Table	Per Table	Per Tables on Page 1, The voltage is DC+ to DC-.
Output Constant Current	-5%	Per Table	+5%	Per Tables on Page 1
Flickering Index (Vpk-pk)	---	---	25% Vo	20MHz BW, 1-100% dimming output in parallel with 0.1uF & 10uF CAP. Flickering Index is defined as $[(Y_{max}-Y_{min})/(Y_{max}+Y_{min})] * 100\%$. Y may be V or I
Flickering Index (Ipk-pk)	---	25% Io	30% Io	
Line Regulation	-3%	---	+3%	Measured at 120-277 Vac Input, Output Full Load
Load Regulation	-4%	---	+4%	Measured at 120-277 Vac Input
Start-up Time	---	330ms	500ms	Measured at 120-277 Vac Input, Output Full Load
	---	460ms	500ms	Measured at 120-277 Vac Input, Dimming set at 50%
	---	1.0 s	1.3 s	Measured at 120-277 Vac Input, Dimming set at 10%
	---	1.8 s	2.1 s	Measured at 120-277 Vac Input, Dimming set at 1%



Excellent LED Drivers

Sino-US joint venture

Output Overshoot		-5%	---	+10%	Measured at 120-277 Vac Input, When power on or off
Dim to Off Time	nc	---	0.4 s	---	Normal off. (default)
	-S	---	2.0 s	---	Soft off (Pending)

Protection Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Output Short Circuit (SCP)	---	---	---	No Damage. Auto recovery after short is removed.
Output Over Current (OCP)	---	---	+10% Io	Constant Current Limiting circuit.
Output Over Voltage (OVP)	---	---	+20% Vo	No Damage. Auto recovery after short is removed.
Temperature Protection (OTP)	95°C		110°C	At Tc from 95 to 110, the output current decreases linearly from maximum to zero.

Dimming Specifications

Items	Parameter		Min.	Typ.	Max.	Notes / Conditions
0-10V Dimming (Compatible PWM, Rset Dimming, Additional datasheet)	Input Absolute Voltage		-2.0 V	10 V	15 V	Purple Wire
	Output Source Current (Customizable)		---	---	0.56 mA	Purple Wire
	Output Current Range in 0-10V Dimming (This note is in the case of linear dimming)	nc	0%	---	100%	Dim-to-off @ Vdim < 1.0V, 100% @ Vdim > 8.5V
		-A	1%	---	100%	1% @ Vdim < 1.2V, 100% @ Vdim > 8.5V
		-B	5%	---	100%	5% @ Vdim < 1.2V, 100% @ Vdim > 8.5V
		-C	10%	---	100%	10% @ Vdim < 1.2V, 100% @ Vdim > 8.5V
	Output Current in 0-10V Pin Open		---	Normal	---	Maximum output
Output Current in 0-10V Pin Short Circuit		---	Dim to Off	---	Into standby	
Output Current Delay	Transient Response of Dimming		---	600ms	---	Delay time, when Vdim steps from 0V to 10V

General Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Cooling	Convection			
MTBF	530,000 hours			Measured at 120 Vac input, 100% Load and Tc=85° C (MIL-HDBK-217F).
Life Time	50,000 hours			
Acoustic Noise	< 24 dB Class A			Not to exceed at 1 meter at any dim level.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes / Conditions
Case Temperature (Tc)	-40 °C	---	+90 °C	Measured at location specified on case.
Operating Temperature (Ta)	-40 °C	---	+60 °C	This is a reference range. Tc controls temperature range.
Storage Temperature (Ts)	-40 °C		+85 °C	Non operating temperature range.
Operating Humidity	---	---	95% RH	Relative Humidity. Non-condensing.
Vibration	5 Hz	---	55 Hz	2G, 10 minutes / 1 cycle, period 30 minutes, each along X, Y, Z axis.

Safety Compliance

Safety Category	Standards / Notes
UL / cUL	UL8750, UL1310 Class 2, UL1012 Non Class 2, CSA-C22.2 No. 107.1
CE	EN 61347-1:2007+A1:2010+A2:2012, EN61347-2-13:2014, EN 62493:15
Withstand Voltage	Input to Output: 2000 Vac (UL), 3750 Vac (CE, ENEC) Output to Dim: 2000 Vac
Isolation Resistance	Input to Output: >10MΩ, 500Vdc @ 25°C, 70% RH
0-10V Class 2 Isolated Dimming	DIM+ (Purple) / DIM- (Grey) are Class 2 Isolated from AC Input and DC Output.


EMC Compliance

EMI Category	Standards
FCC	FCC 47CFR Part 15, ANSI C63.4: 2009
CE	EN55015:2013+A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100KHZ ring wave, 2.5KV level, for both common mode and differential mode.
EMS Category	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 2 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


Note: the above test data are in the condition of 25 C ambient temperature, except for the marked temperature.

Typical Applications


■. Constant Current Driver

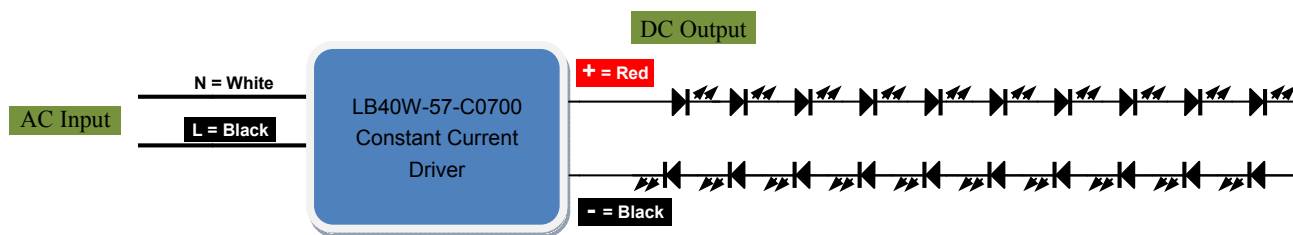

■. 0-10V Dimming Driver

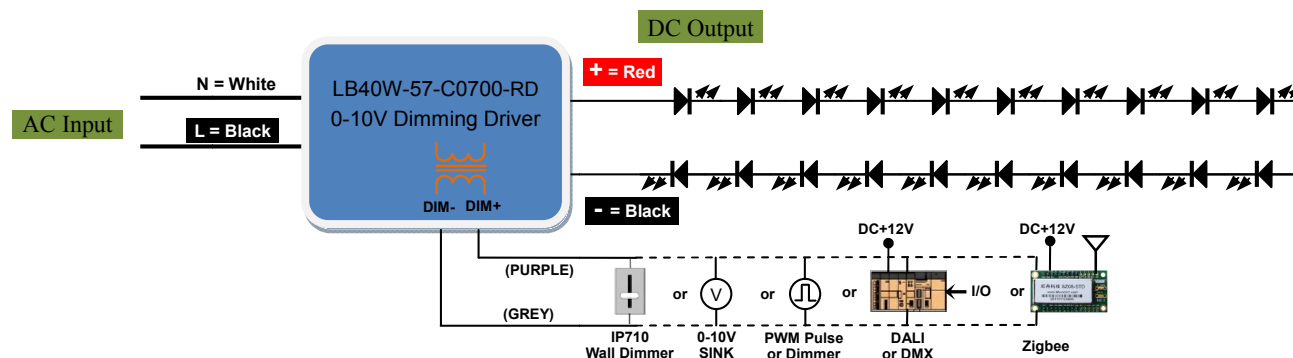


Dimming Curve

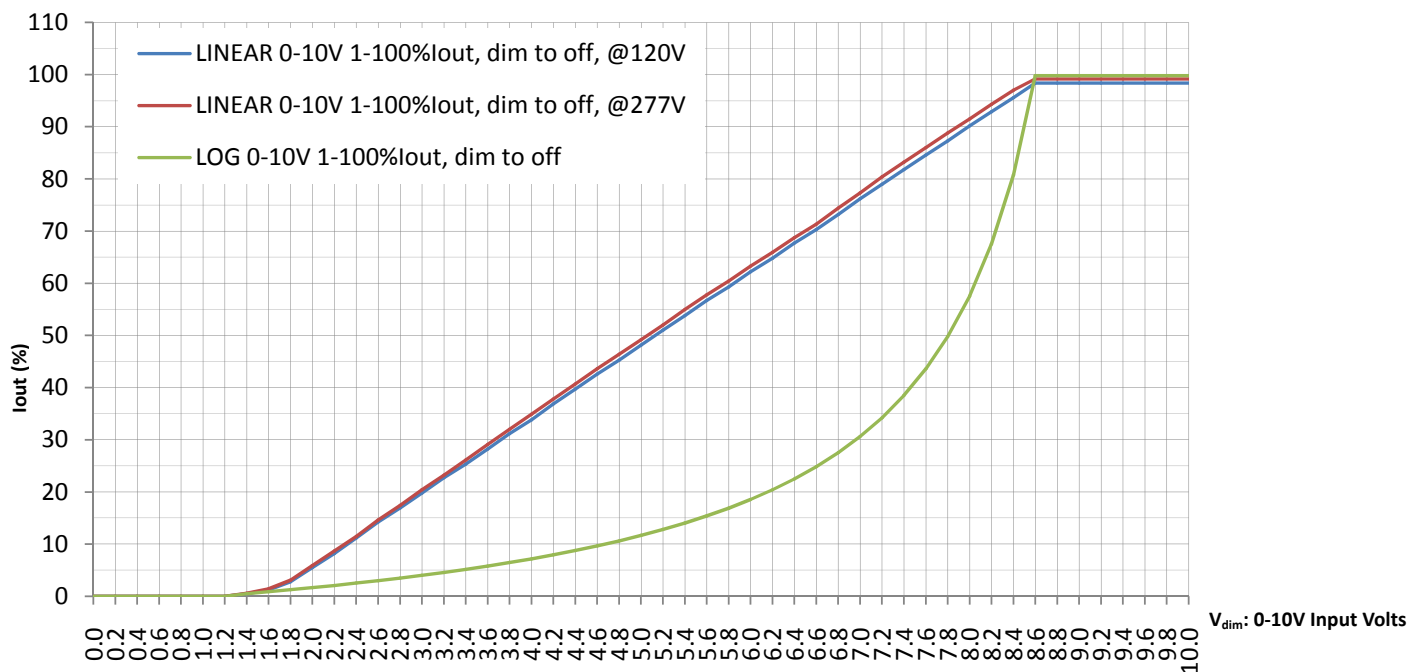


Note:

1. The dimming curve is optional (linear or logarithmic, default: linear).
2. The logarithmic curve needs to be specified.

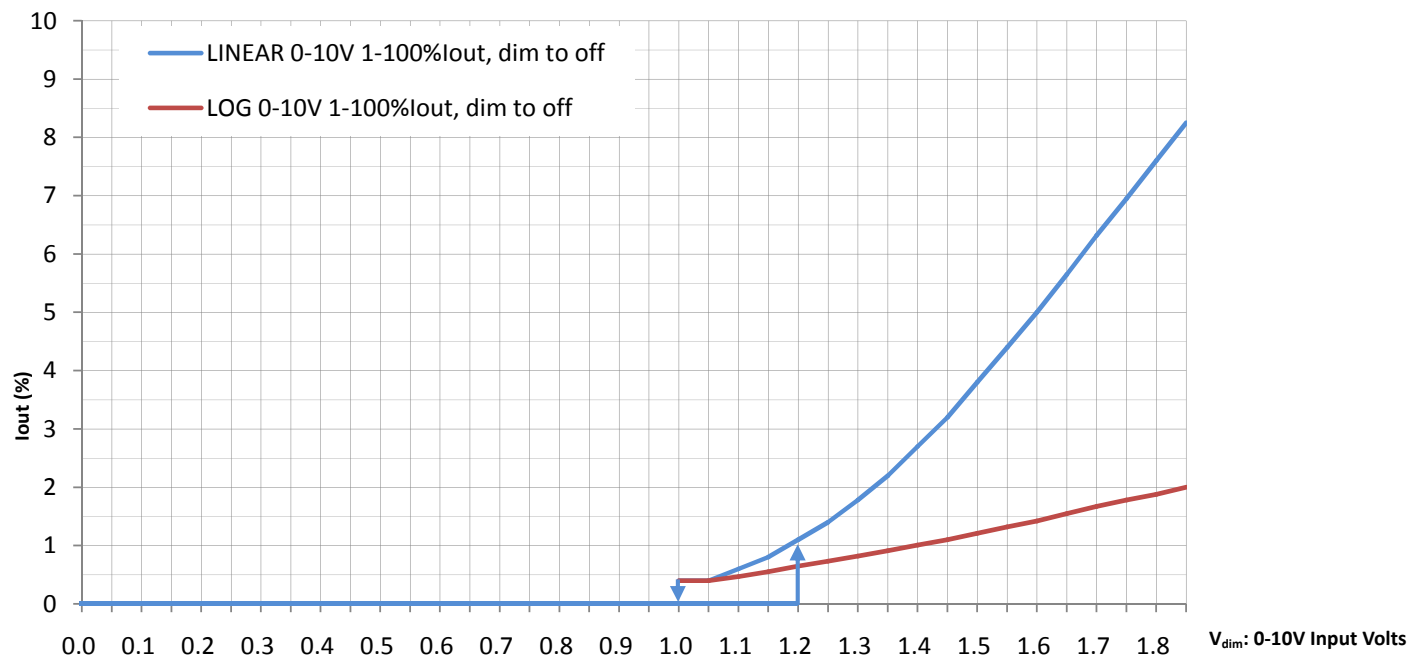


Note: V_{dim_ON} is 1.2V, V_{dim_OFF} is 1.0V. Driver goes into standby state, when V_{dim} is less than 1.0V.

Iout Transient Response vs Vdim Step

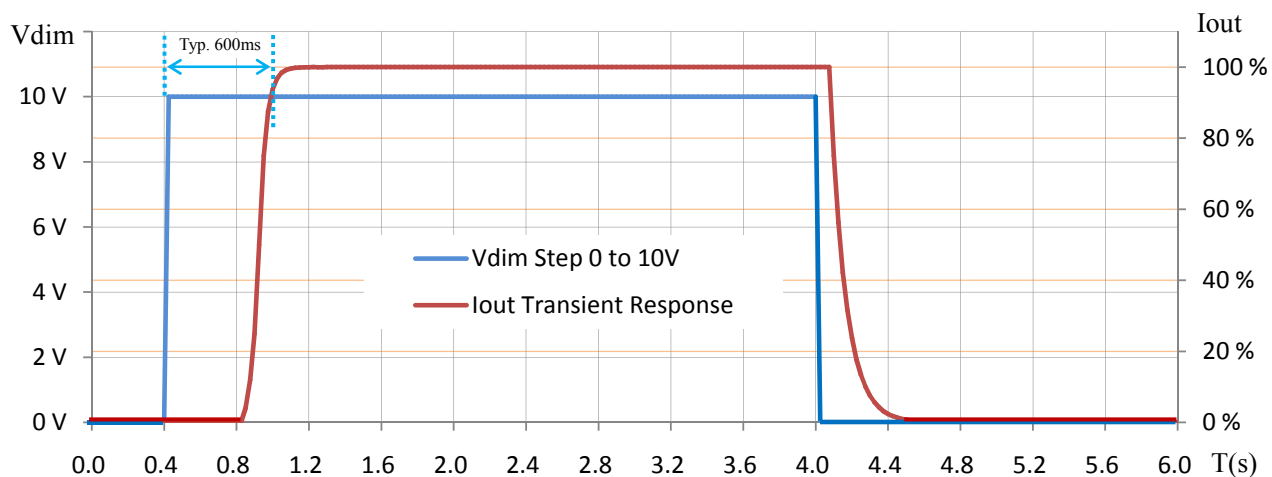


Output current decreases linearly vs. Tc temperature




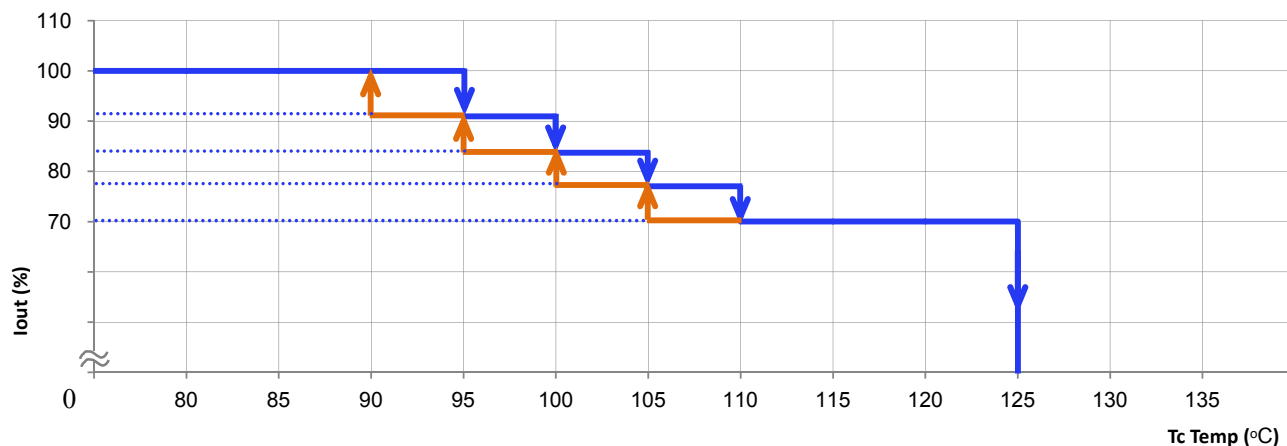


Power Operating Window

The DLC working area of output 40V/1000mA.

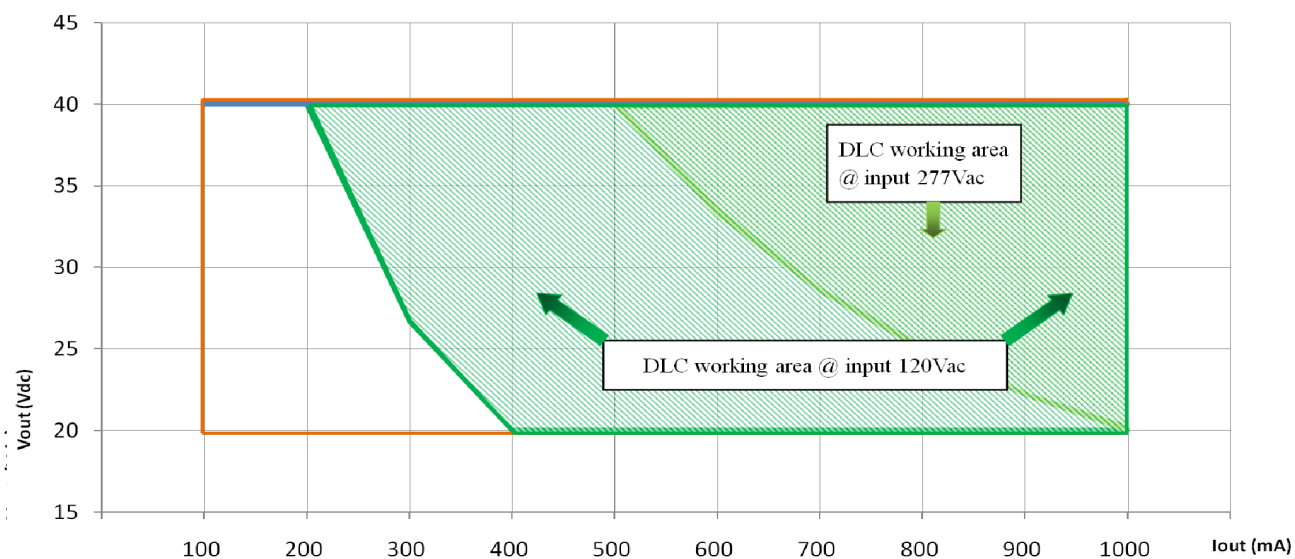

Characteristic Curve

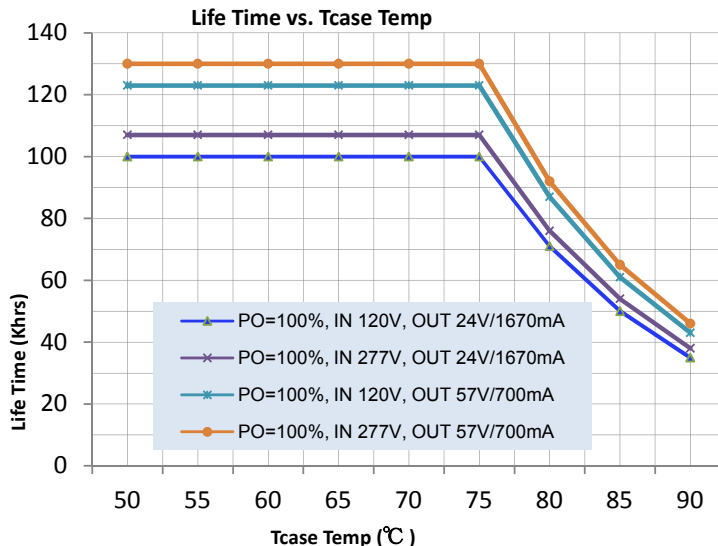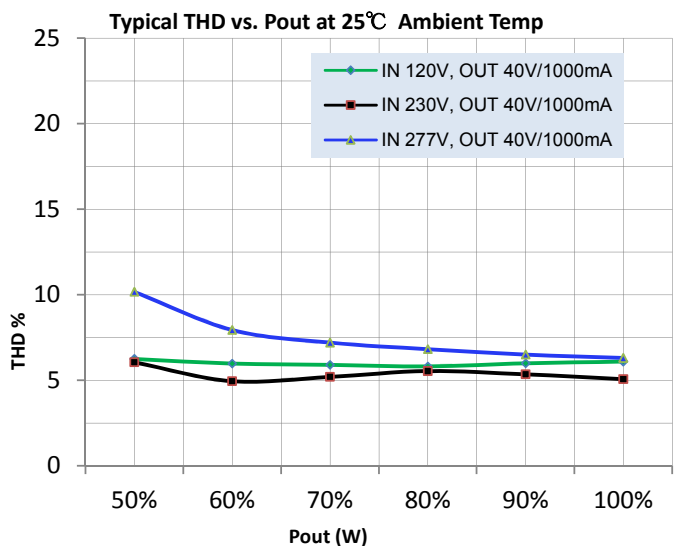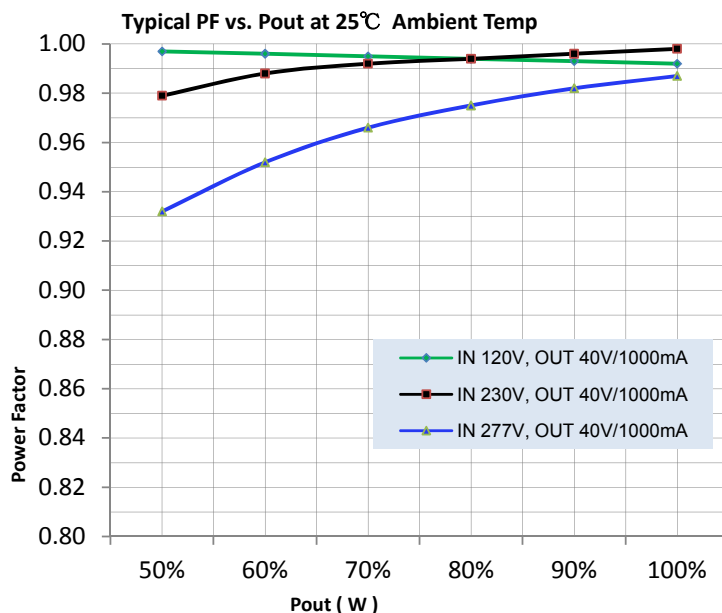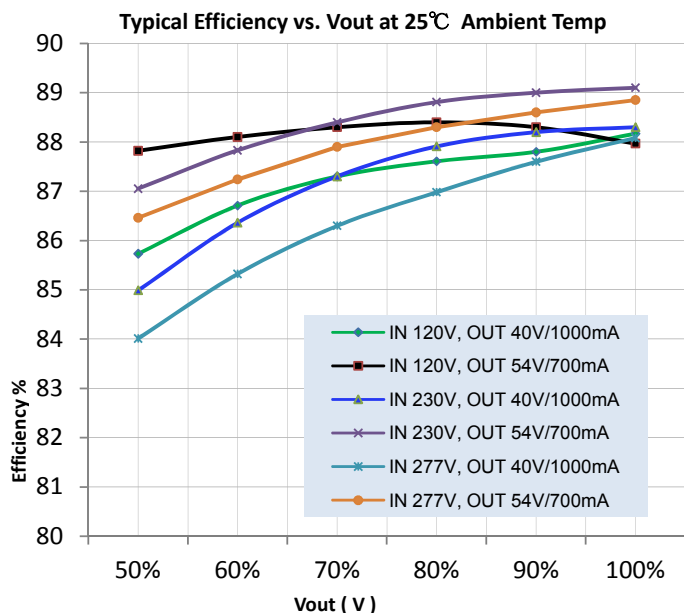

Installation

AC input for connection the two core ANSI/UL1015/AWG18 temperature 105 °C core copper wire connection.

Cable Length: 150mm, stripping on the tin: 10mm.

Where: L — Black wire, N — White wire.

DC output for connection the two core ANSI/UL1569/AWG18 temperature 105 °C core copper wire.

Cable Length: 150mm, stripping on the tin: 10mm.

Where: DC+ — Red, DC- — Black.

The dimmer control input is the two copper wires, ANSI/UL1569/AWG22 & temperature 105 °C.

Cable Length: 150mm, stripping on the tin: 10mm.

Where: DIM+ (0-10V) input — Purple wire, DIM- — Grey wire.

This product has two $\Phi 3.5\text{mm}$ mounting holes.

Order ID

P/N: LB40W - 36 - C1100 - RDL - A

-NC
-RD
-RDL

-A
-B
-C

Note:

-RD Linear dimming curve

-RDL Logarithmic dimming curve

P/N 1: LB40W-36-C1100

Description: 40W, 36Vdc voltage max, constant current 1100mA, constant current mode.

P/N 2: LB40W-36-C1100-RD

Description: 40W, 36Vdc voltage max, current 1100mA max, minimum dimming to 1%, dim-to-off, normal off, 0-10V dimming mode.

P/N 3: LB40W-36-C1100-RD-A

Description: 40W, 36Vdc voltage max, current 1100mA max, minimum dimming to 1%, 0-10V dimming mode.


P/N 4: LB40W-36-C1100-RD-B

Description: 40W, 36Vdc voltage max, current 1100mA max, minimum dimming to 5%, 0-10V dimming mode.

P/N 5: LB40W-36-C1100-RD-C

Description: 40W, 36Vdc voltage max, current 1100mA max, minimum dimming to 10%, 0-10V dimming mode.


Product size

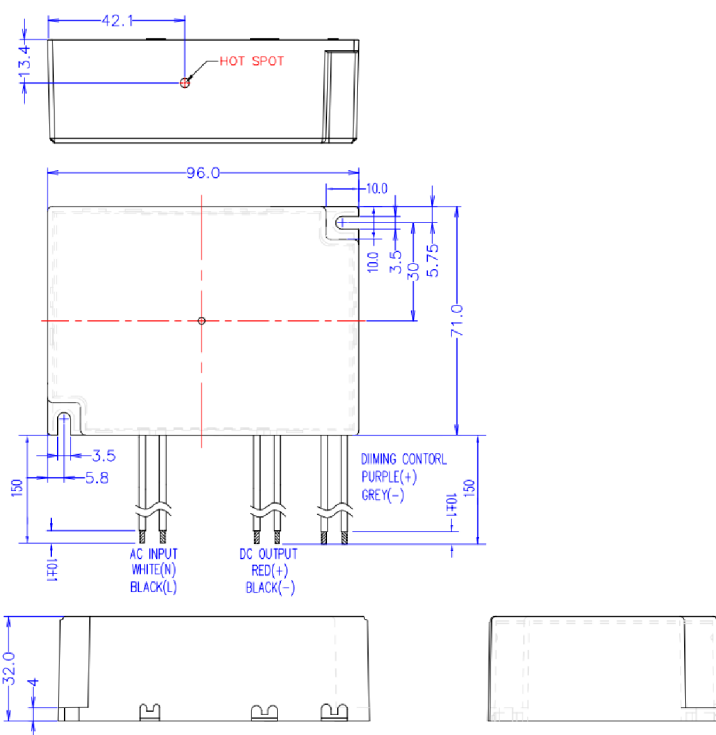


Notes: The Driver Tc (HOT SPOT) should be located at side of case.

Application note

Picture 1

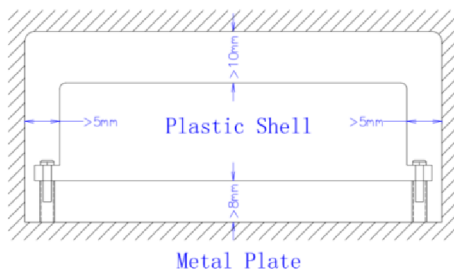

Picture 2

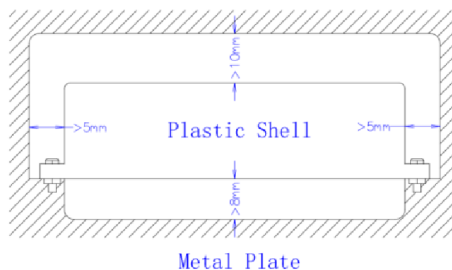

In Picture 1 and Picture 2,
EMC has the best.

Note :

- The independent LED drive conforms to the EMC standard.
But it is not guaranteed to be qualified, when the drive is mounted in the LED lamp.
- Please forgive us for any discrepancy due to the update of the specifications or the upgrade of the product.
If you need the latest information, please contact our marketing department.